



Valvola di sequenza pilotata
Sequence valve pilot-operated
mod. BM028800




Portata massima Max flow	40 l/min 10,6 gpm
Pressione massima Max pressure	250 bar 3600 psi
Taratura valvola sequenza Sequence valve setting	120 bar 1740 psi

Modello Type	A, B	PIL
BM028800	1/2" GAS	1/2" GAS

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperatura di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

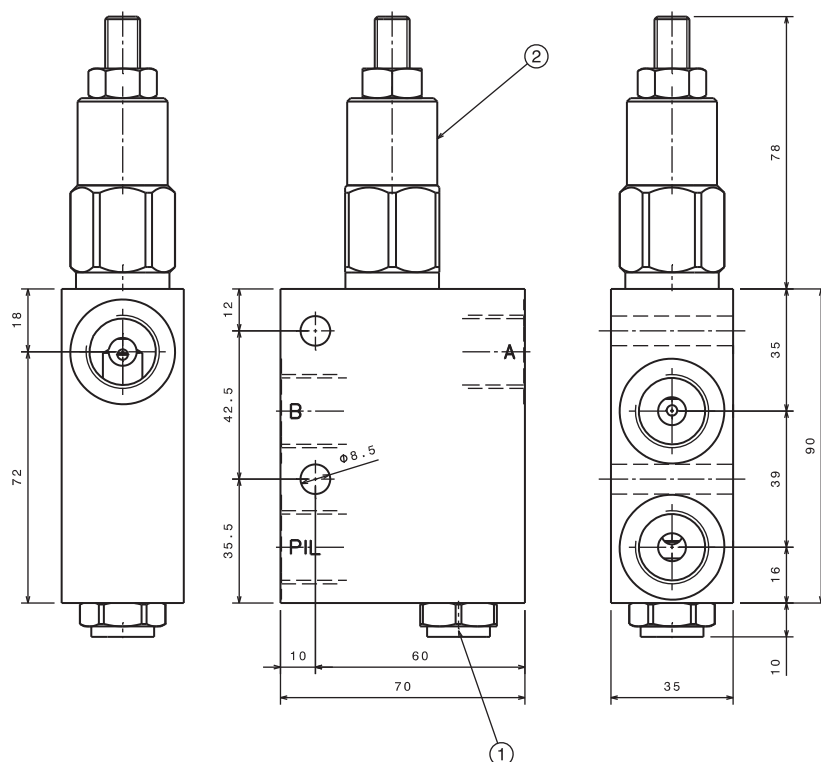

Sigla di ordinazione / Ordering code

BM028800

Modello
Type

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, **CBF** reserves the right to introduce modifications without notice.