
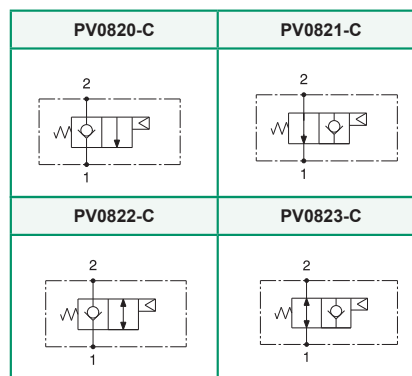


Valvola manuale direzionale a cartuccia, apertura in spinta
Manual directional valve, spring return, push to open – cartridge type



mod. MV-08-2X-C

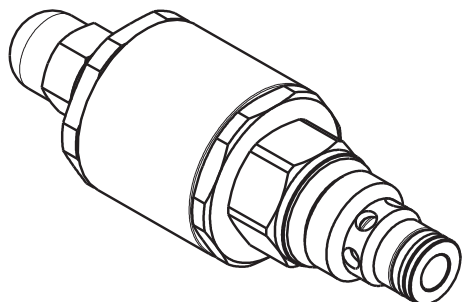


Portata massima Max flow	40 l/min 11 gpm
Pressione massima Max pressure	350 bar 5000 psi
Trafilamento Max. Max. Leakage	15 gocce/min 15 drops/min
Coppia di serraggio Installation torque	40 ÷ 50 Nm 30 ÷ 37.5 lbt ft

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperature di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

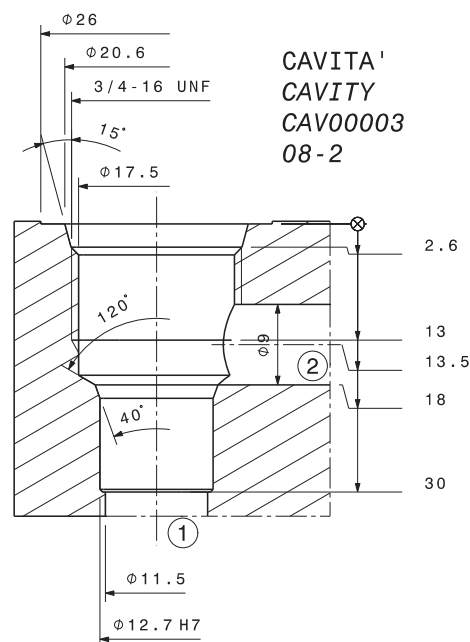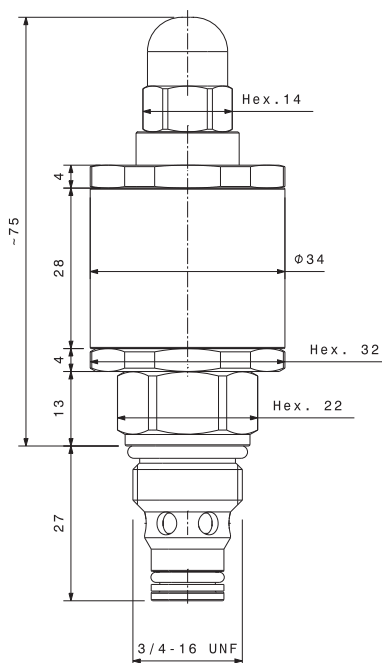

Sigla di ordinazione / Ordering code

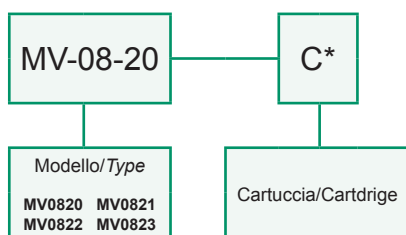

For flow diagram see
PRESSURE DROP MANUAL VALVE (1)

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, **CBF** reserves the right to introduce modifications without notice.