



Valvola limitatrice di pressione doppia incrociata – in linea
In line, dual cross relief valve
 mod. VLP-DI-L

Versione con corpo in alluminio o in acciaio*
 Aluminium or steel* body version

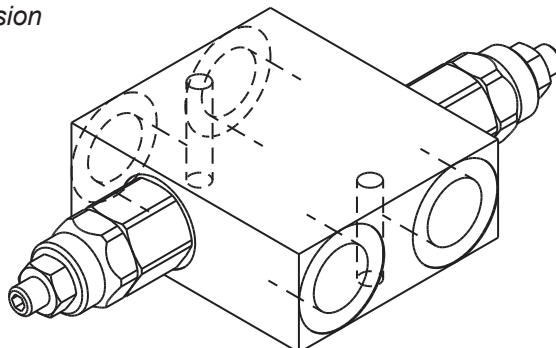


Modello Type	V1, V2	Pressione max. Max. pressure	Portata max Max. flow
VLP10-DI-L-14	1/4" GAS	300 bar 4300 psi	10 l/min 2.7 gpm
VLP10-DI-L-38	3/8" GAS	300 bar 4300 psi	10 l/min 2.7 gpm
VLP40-DI-L-38	3/8" GAS	300 bar 4300 psi	35 l/min 9 gpm *
VLP40-DI-L-12	1/2" GAS	300 bar 4300 psi	40 l/min 10.5 gpm
VLP80-DI-L-12	1/2" GAS	300 bar 4300 psi	80 l/min 21 gpm *
VLP80-DI-L-34	3/4" GAS	300 bar 4300 psi	80 l/min 21 gpm *
VLP130-DI-L-34	3/4" GAS	250 bar 3600 psi	130 l/min 34 gpm
VLP130-DI-L-10	1" GAS	250 bar 3600 psi	130 l/min 34 gpm *

Taratura Setting		
Codice Code	Taratura standard Standard setting	Campo di taratura Adj. Pressure range
00	40 bar 580 psi	5÷40 bar 72.5÷580 psi
01	80 bar 1160 psi	20÷100 bar 290÷1450 psi
02	180 bar 2600 psi	40÷250 bar 580÷3600 psi
03	250 bar 3600 psi	60÷350 bar 870÷5000 psi

Regolazioni Adjustments			
A Vite esterna esagono incassato Leakproof hex socket screw	B Volantino e dado Handknob and locknut	C Piombatura Sealing cap	D Cappellotto Cap

Sigla di ordinazione / Ordering code

VLP40-DI-L-38	02	A
Modello Type	Codice taratura Setting code 00, 01, 02, 03	Codice regolazione Adjustment code A, B, C, D

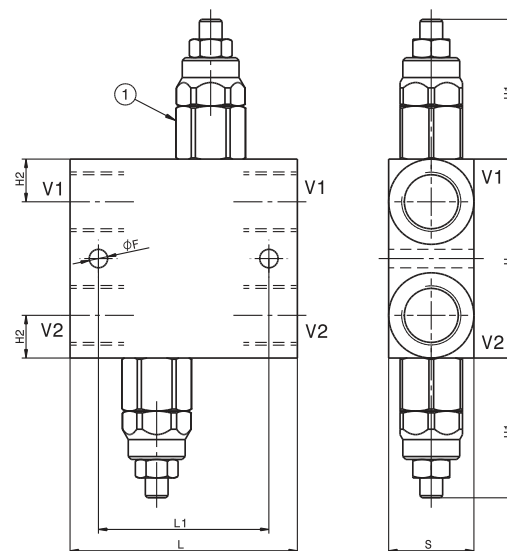

For flow diagram see performance of cartridge

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
 Performances and calibrations are carried out by using hydraulic oil
 with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperature di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

Modello Type	①	L	L1	H	H1	H2	F	S
VLP10-DI-L-14	VLP10C	70	50	60	32	14	6.5	30
VLP10-DI-L-38	VLP10C	70	50	60	32	14	6.5	30
VLP40-DI-L-38	VLP40C	80	60	70	50	15	6.5	30
VLP40-DI-L-12	VLP40C	80	60	70	50	15	6.5	30
VLP80-DI-L-12	VLP80C	100	80	70	62	16	6.5	35
VLP80-DI-L-34	VLP80C	100	80	90	62	19	6.5	40
VLP130-DI-L-34	VLP130CD	110	80	90	62	19	8.5	40
VLP130-DI-L-10	VLP130CD	120	80	100	62	23	8.5	60

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, CBF reserves the right to introduce modifications without notice.