

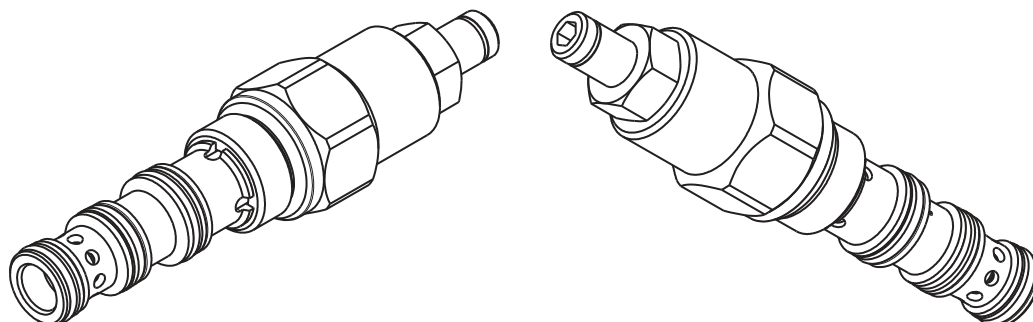


Valvola di messa a scarico pilotata
Priority unloading valve pilot operated – cartridge type
mod. VMSP10-4-C

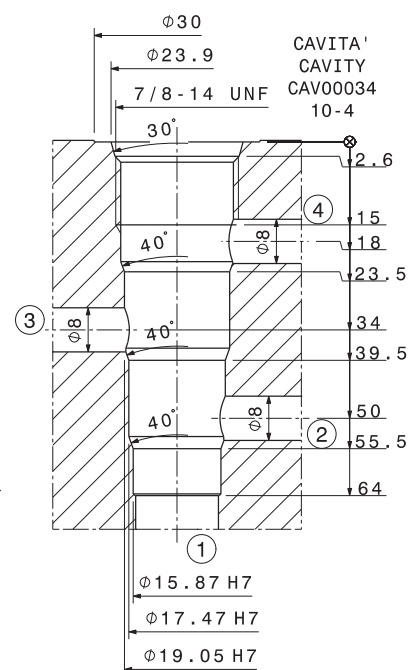

Portata massima Max flow	30 l/min 8 gpm
Pressione massima Max pressure	350 bar 5000 psi
Re-seat	85 +- 4% of pressure setting
Coppia di serraggio Installation torque	35 ÷ 40 Nm 26 ÷ 30 lbf ft
Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C	
Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperatura di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

Taratura Setting		
Codice Code	Taratura standard Standard setting (Q=5 l/min)	Campo di taratura Adj. Pressure range
01	80 bar 1160 psi	30÷120 bar 290÷1450 psi
02	180 bar 2600 psi	40÷210 bar 580÷3600 psi

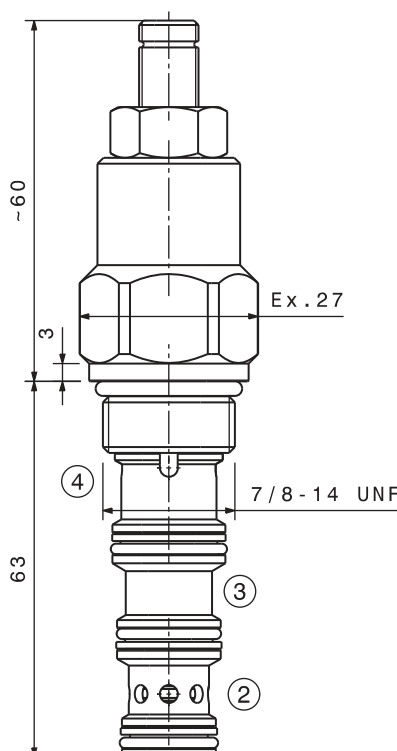

Regolazioni Adjustments			
A		B	
C		D	

Sigla di ordinazione / Ordering code

VMSP10-4-C	01	A
Modello Type	Codice taratura Setting code 01, 02	Codice regolazione Adjustment code A, B, C, D

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, **CBF** reserves the right to introduce modifications without notice.