

CBF s.r.l. - Via Caboto, 3 - 36075 Montecchio Maggiore (VI)
Tel. 0444 499141 / 0444 499143 - Fax 0444 499145
e-mail: info@cbfhydraulic.com - http://www.cbfhydraulic.com

Valvola selettrice
Shuttle valve
mod. VSF / VSM


Corpo in alluminio
Aluminium body



VSF





VSM



Modello *Type*	V V1 U	Portata massima *Max Flow*	Pressione massima *Max pressure*
VSF-14	1/4" GAS	20 l/min *5.3 gpm*	350 bar *5000 psi*
VSF-38	3/8"GAS	40 l/min *10.5 gpm*	350 bar *5000 psi*
VSF-12	1/2"GAS	60 l/min *16 gpm*	350 bar *5000 psi*
VSF-34	3/4"GAS	100 l/min *26 gpm*	280 bar *4000 psi*
VSM-14	1/4" GAS	20 l/min *5.3 gpm*	350 bar *5000 psi*
VSM-38	3/8"GAS	40 l/min *10.5 gpm*	350 bar *5000 psi*
VSM-12	1/2"GAS	60 l/min *16 gpm*	350 bar *5000 psi*
VSM-34	3/4"GAS	100 l/min *26 gpm*	280 bar *4000 psi*

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C *Performaces and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C*	
Viscosità consigliate *Recommended viscosity*	10 ÷ 420 cSt
Temperature di lavoro *Working temperature*	-20 ÷ +90 °C
Filtrazione assoluta *Absolute filitration*	25 µ

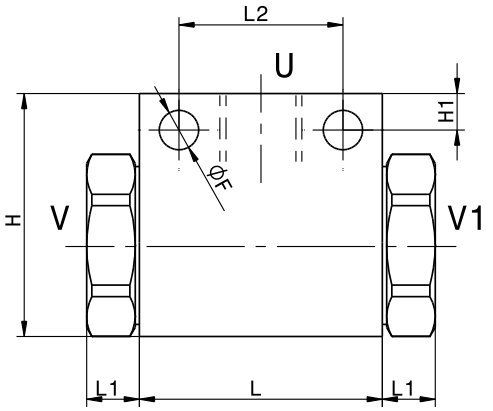

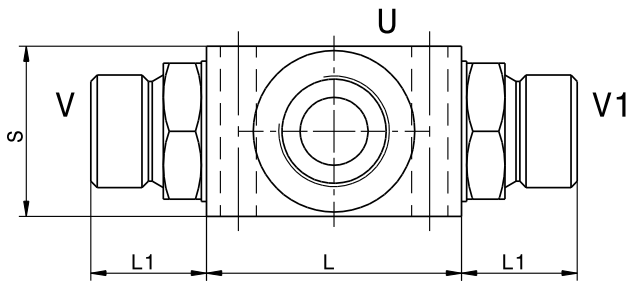

Dimensioni Dimensions	L	L1	L2	H	H1	S	F
VSF-14	40	9	27	40	6	30	6.5
VSF-38	50	21	34	40	10	30	6.5
VSF-12	60	26	40	50	10	30	6.5
VSF-34	60	30	45	60	10	40	8.5
VSM-14	40	31	27	40	6	30	6.5
VSM-38	50	21	34	40	10	30	6.5
VSM-12	60	28	40	50	10	30	6.5
VSM-34	60	27	45	60	10	40	8.5

Sigla di ordinazione / Ordering code

VSM-38

Modello
Type

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
*The specifications are not binding, **CBF** reserves the right to introduce modifications without notice.*

Aggiornamento / *Update 09-09-2014*