

CBF s.r.l. - Via Caboto, 3 - 36075 Montecchio Maggiore (VI)
Tel. 0444 499141 / 0444 499143 - Fax 0444 499145
e-mail: info@cbfhydraulic.com - http://www.cbfhydraulic.com

Valvola regolatrice di flusso compensata tre vie con comando elettrico
3 ways, pressure compensated flow regulator valve with electric drive


mod. RFP-A-CE

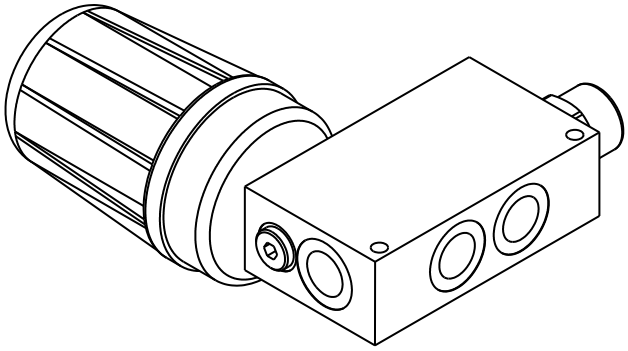



Modello *Type*	P, B, C	Portata max *Max flow*		Pressione max *Max pressure*
		Ingresso *Inflow* **P**	Regolata *Regulated* **C**	
RFP-A-38-CE	3/8" GAS	60 l/min *16 gpm*	35 l/min *9 gpm*	270 bar *3900 psi*
RFP-A-12-CE	1/2" GAS	100 l/min *26 gpm*	65 l/min *17 gpm*	270 bar 3900 psi
RFP-A-34-CE	3/4" GAS	150 l/min *40 gpm*	90 l/min *24 gpm*	270 bar 3900 psi
RFP-A-10-CE	1" GAS	380 l/min *100 gpm*	190 l/min *50 gpm*	270 bar 3900 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C *Performaces and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C*	
Viscosità consigliate *Recommended viscosity*	10 ÷ 420 cSt
Temperature di lavoro *Working temperature*	-20 ÷ +90 °C
Filtrazione assoluta *Absolute filitration*	25 µ

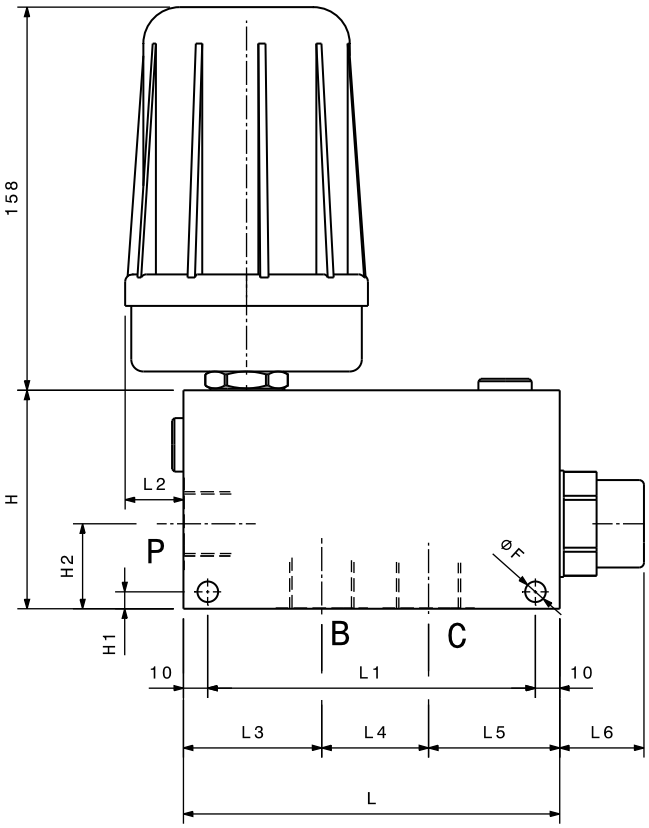

Modello *Type*	**L**	**L1**	**L2**	**L3**	**L4**	**L5**	**L6**	**H**	**H1**	**H2**	**F**	**S**
RFP-A-38-CE	130	110	28	48	37	45	38	70	6	28	6.5	40
RFP-A-12-CE	130	110	28	48	37	45	38	70	6	28	6.5	40
RFP-A-34-CE	155	135	24	57	44	54	35	90	7	35	8.5	50
RFP-A-10-CE	150	130	22	46	56	48	55	130	10	65	8.5	60

Sigla di ordinazione / Ordering code

RFP-A-34-CE — 12

- RFP-A-34-CE: Modello *Type*
- 12: Tensione / *Voltage*
  - **12** 12 VDC
  - **24** 24 VDC

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
*The specifications are not binding, **CBF** reserves the right to introduce modifications without notice.*

Aggiornamento / *Update 01-08-2016*